


MK 4600

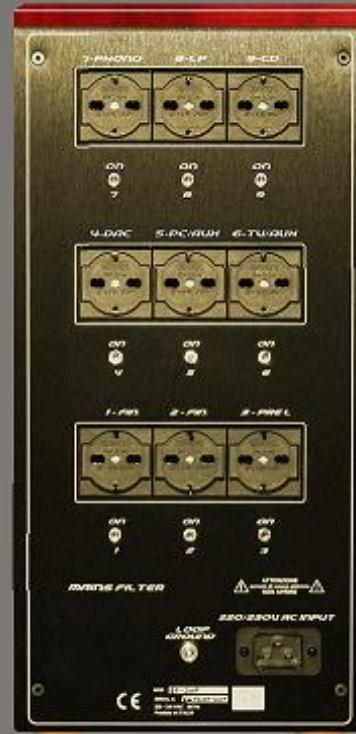

MK 4600 Mains Filter

Max Power Handling: 4600 Watts Total

Total dedicated filtered outputs: 9

1) & 2) Power Amplifier (max output power 1500W each)

3) Line Preamplifier + 7) Phono Preamplifier + 8) Turntable (max. output power 500W on 3 outlets)

4) Dac + 5) PC/Aux + 6) TV/Aux (max. output power 1000W on 3 outlets)

9) CD player (max. output power 100W)

PS: The 3,7&8 Output connectors (Line Pre, Phono Pre and Turntable) are wired by a single Main Power Transformer with a maximum output power of 500W. You can use also a single output connector with a maximum load of 500W or you can share the load in different ways, without exceeding the maximum supported power of the transformer. This is also true for 4,5&6 output connectors that are wired with a single Main Transformer with a maximum output power of 1000W.

Operating voltage :230V +/-10%

Dimensions (HxWxD): 465x515x220mm

Weight: Kgs 55